Dim-Out Blind Systems

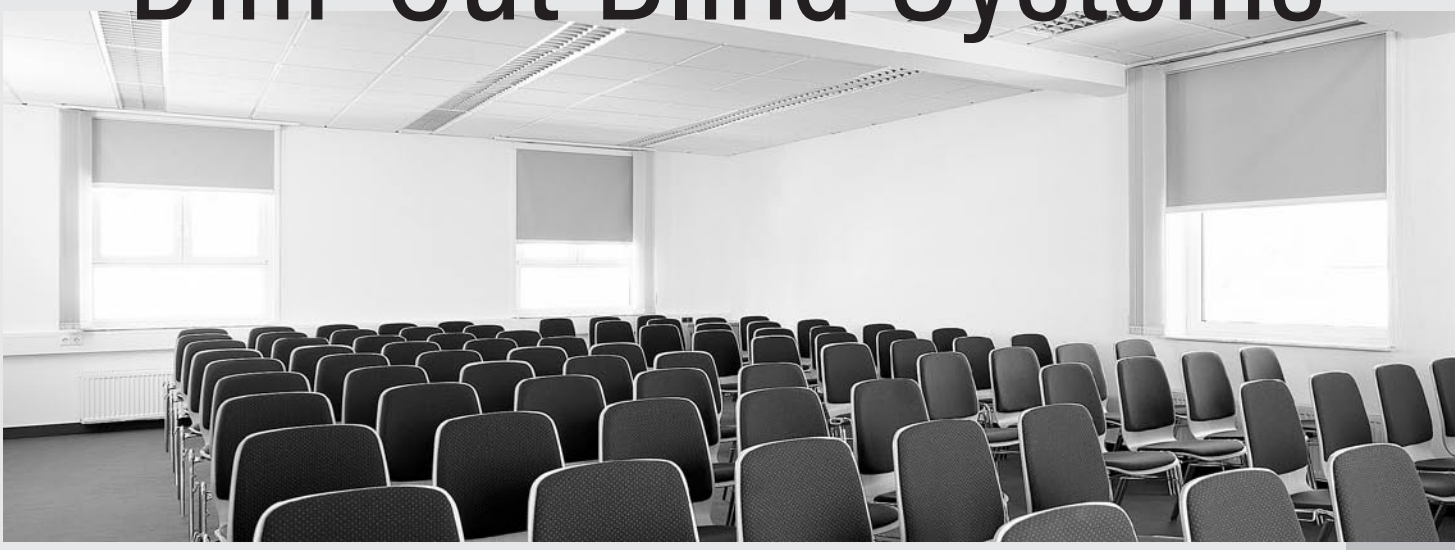

Chain Operated Dim-Out Blind System

Silent Gliss® 4710 Small

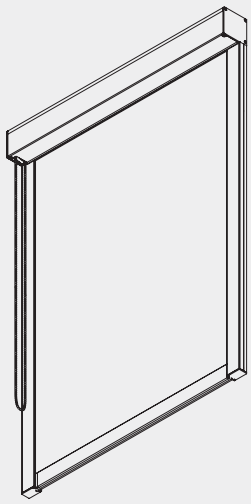

Product Information

- Technically advanced chain-operated dim-out blind system.
- For applications up to 1.6m wide, 1.6m high or 2.5m² with a maximum weight of 2kg.
- Easy click-in side profiles.
- Fabrics are 'zipped' into the side profiles.
- Inside or outside recess fitting.
- Supplied powder coated in black or white.
- Delivered ready-assembled, made-to-measure.
- Suitable for inclined positions up to 15° from vertical.
- Spring assisted when required (larger sizes).

Profile and Bending Information



10994-5

Cannot be bent



10532

Cannot be bent

How to Measure

Inside fitting

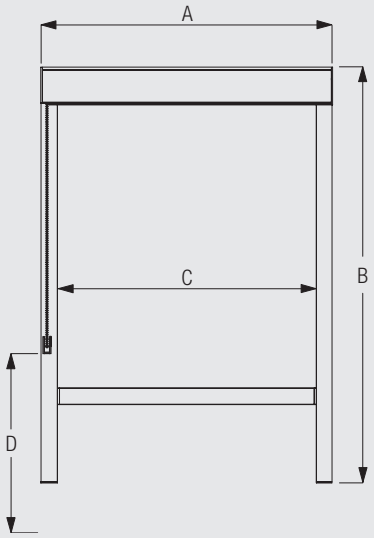

A: System width
B: System drop
C: Fabric width
D: Safety Retainer 10400 min. 150cm above floor

4710

Face fitting

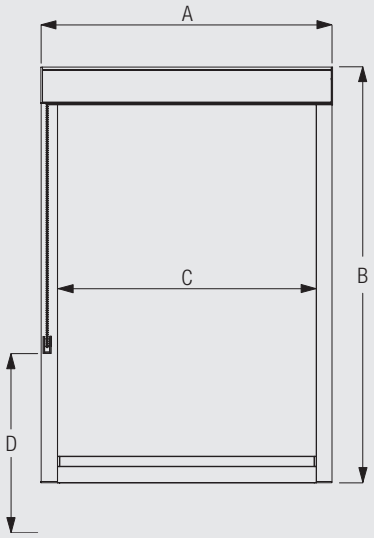

A: System width
B: System drop
C: Fabric width
D: Safety Retainer 10400 min. 150 cm above floor

System Dimensions

max.	min.	max.	m² max.	kg max.
1.6m	65cm	1.6m	2.5 m²	2kg

Please note: The max. system width/drop also depends on the fabric type.

Fitting Information

Positioning of drill holes

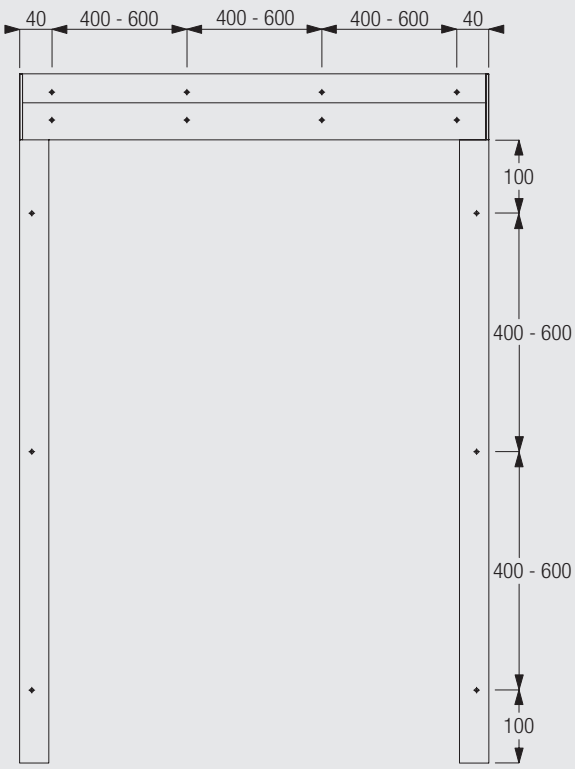

Side profiles 11001 and 11002

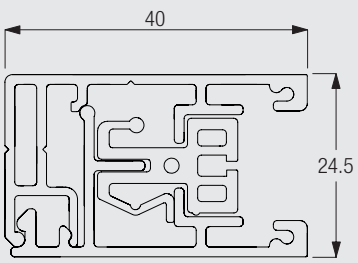

Profile drawing includes zip profile.

Fitting Options

Ceiling fitting with direct mounting

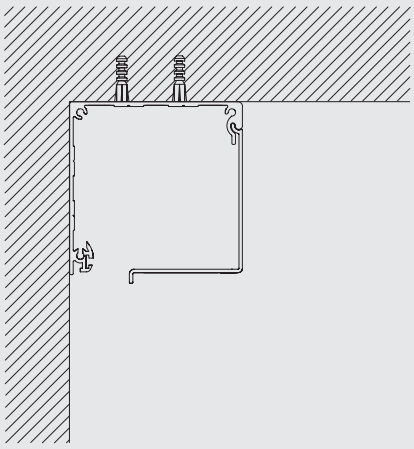

Wall fitting with direct mounting

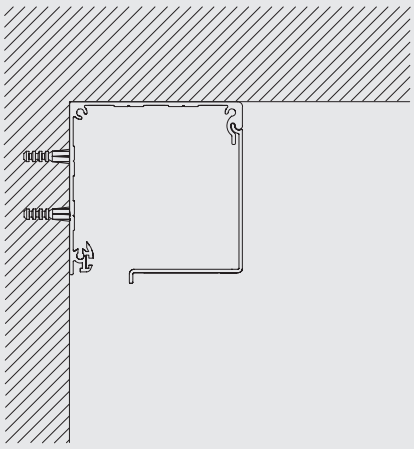

Recess fitting with direct mounting

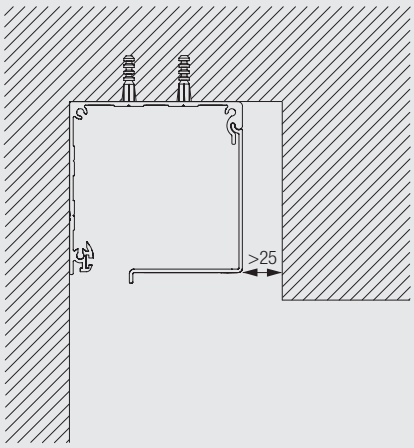

Standard Accessories

10400	Safety Cord Retainer		10532	Profile	

10961	Zip profile		10993	Bottom weight	
11001	Side guide case		11002	Side guide cover	
11004	Side cover left for box, 73 mm		11010	Clip for chain drive	
11011	Clip for support		11024	Zip guide	
11026	Cover left for side guide		11027	Cover right for side guide	
11028	Bottom weight guide left		11029	Bottom weight guide right	
11030	Bottom weight cover		11031	Chain drive (S)	
11040	Stainless steel bead chain (ø 4.5 mm)		10994-5	Box case and cover, 73 mm	

Useful Measures

10993	Bottom weight		11004	Side cover left for box, 73 mm	

www.bradingfabrication.com

Brading Fabrication Limited
1885 Clements Road, Unit 228
Pickering, ON, Canada
L1W 3V4

Tel: 289-372-3014

info@bradingfabrication.com

SGGB_TB_DO_4710_20180221 /